


Polymer Systems Technology Limited

UK & Ireland Distributor



© 2011 - Polymer Systems Technology Limited TM
Unit 2. Network 4. Cressex Business Park,
Lincoln Road, High Wycombe, Bucks. HP12 3RF
Phone +44 (0) 1494 446610
Fax: +44 (0) 1494 528611
Web: <http://www.siliconepolymers.co.uk>
Email: sales@silicone-polymers.co.uk

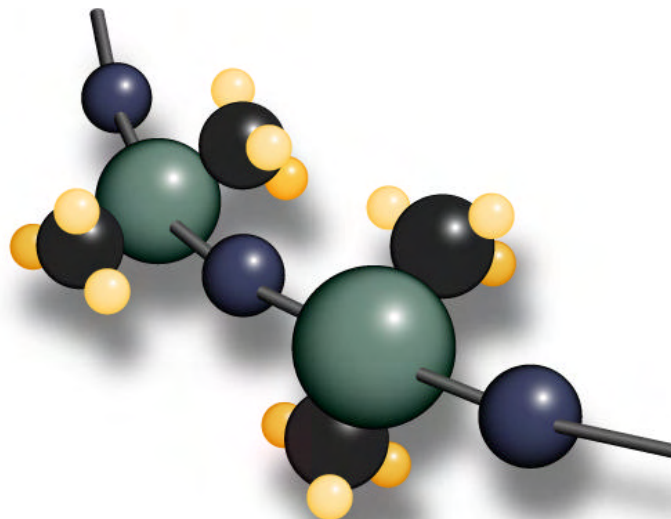



Creative Partners in a Material World

NuSil Technology LLC
 1050 Cindy Lane • Carpinteria, CA 93013
 805/684-8780 • 805/566-9905 Fax
 www.nusil.com • silicone@nusil.com

An ISO 9001 and AS9100
 Certified Company

R-2620

Silicone Impregnating / Encapsulating Compound

Description

- High strength, two-part, tan, low viscosity silicone material
- Extended work time
- Reduced cure time with increased temperatures
- Maintains elastomeric properties and electrical stability across a broad temperature range
- 10:1 Mix Ratio (Part A: Part B)

Applications

- For use as an impregnating and/or encapsulating compound for electrical and electronic applications
- Low viscosity facilitates rapid impregnation of closely approximated parts such as transfer coils
- Accelerated cure can be achieved at low temperatures to prevent damage to heat sensitive components
- Provides protection from shock, vibration, moisture, ozone, dust, chemicals and other environmental hazards

Properties	Average Result	ASTM	NT-TM
Uncured:			
Appearance	Tan	D2090	002
Viscosity	9,600 cP (9,600 MPas)	D1084, D2196	001
Work Time	4.6 hours	-	008
Cured : Cured 30 min @ 150°C (302°F)			
Specific Gravity	1.22	D792	003
Durometer, Type A	60	D2240	006
Tensile Strength	1290 psi (8.9 MPa)	D412	007
Elongation	85 %	D412	007

Properties tested on a lot-to-lot basis. Do not use the properties shown in this technical profile as a basis for preparing specifications. Please contact NuSil Technology for assistance and recommendations in establishing particular specifications.

Instructions for Use

Mixing

Stir the base prior to weighing for curing agent distribution. Mix in a 10:1 ratio Part A to Part B, taking care to minimize air entrapment during mixing.

Vacuum Deaeration

Remove air entrapped during mixing by common vacuum deaeration procedure, observing all applicable safety precautions. Slowly apply vacuum, up to 28 inches Hg, to a container rated for use and of volume at least four times that of material being deaerated. Hold vacuum until presence of air is no longer evident.

Substrate Consideration

Cures in contact with most materials common to electronic assemblies. Exceptions include butyl and chlorinated rubbers, some RTV silicones containing oranotin and/or amines and unreacted residues of some curing agents.

Adjustable Cure Schedule

Product cures at a wide range of cure times and temperatures to accommodate different production needs. Contact NuSil Technology for details.

Packaging

- 1 Pint Kit (505 g)
- 1 Gallon Kit (4.04 kg)
- 5 Gallon Kit (20.2 kg)

Warranty

6 Months

Heat and Low-Temperature Resistance

In most applications, silicone may be heated from 180 to 200°C for a year, or even up to 450°C for short periods, without any appreciable effect on physical properties. Silicone also demonstrates flexibility at extreme low temperatures, with a stiffening temperature of approximately -115°C.

The operating temperature range of a silicone in any application is dependent on many variables, including but not limited to: temperature, time of exposure, type of atmosphere, exposure of the material's surface to the atmosphere, and mechanical stress. In addition, a material's physical properties will vary at both the high and low end of the operating temperature range. The user is responsible to verify performance of a material in a specific application.

RoHS and REACH Compliance

R-2620 is compliant with the Restriction of the Use of Certain Hazardous Substances in Electrical and Electronic Equipment (RoHS) regulation contained in Article 4(1) of the European Parliament and Council's Directive 2002/95/EC. RoHS mandates that manufacturers restrict the use of lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyls, polychlorinated biphenyls, and polybrominated diphenyl ethers in electrical and electronic equipment.

R-2620 is also compliant with the Registration, Evaluation, and Authorization of Chemicals (REACH) regulation (European Union 1907/2006). R-2620 does not contain any of the 16 chemicals identified as Substances of Very High Concern (SVHC) by the European Chemicals Agency (ECHA), which oversees REACH compliance.

Please contact NuSil Technology's Regulatory Compliance department with any questions or for further assistance.

Specifications

Do not use the properties shown in this technical profile as a basis for preparing specifications. Please contact NuSil Technology for assistance and recommendations in establishing particular specifications.

Warranty Information

The warranty period provided by NuSil Technology LLC (hereinafter "NuSil Technology") is 6 months from the date of shipment when stored below 40°C in original unopened containers. Unless NuSil Technology provides a specific written warranty of fitness for a particular use, NuSil Technology's sole warranty is that the product will meet NuSil Technology's then current specification. NuSil Technology specifically disclaims all other expressed or implied warranties, including, but not limited to, warranties of merchantability and fitness for use. The exclusive remedy and NuSil Technology's sole liability for breach of warranty is limited to refund of purchase price or replacement of any product shown to be other than as warranted. NuSil Technology expressly disclaims any liability for incidental or consequential damages.

Warnings About Product Safety

NuSil Technology believes, to the best of its knowledge, that the information and data contained herein are accurate and reliable. The user is responsible to determine the material's suitability and safety of use. NuSil Technology cannot know each application's specific requirements and hereby notifies the user that it has not tested or determined this material's suitability or safety for use in any application. The user is responsible to adequately test and determine the safety and suitability for their application and NuSil Technology makes no warranty concerning fitness for any use or purpose. NuSil Technology has completed no testing to establish safety of use in any medical application.

NuSil Technology has tested this material only to determine if the product meets the applicable specifications. (Please contact NuSil Technology for assistance and recommendations when establishing specifications.) When considering the use of NuSil Technology products in a particular application, review the latest Material Safety Data Sheet and contact NuSil Technology with any questions about product safety information.

Do not use any chemical in a food, drug, cosmetic, or medical application or process until having determined the safety and legality of the use. The user is responsible to meet the requirements of the U.S. Food and Drug Administration (FDA) and any other regulatory agencies. Before handling any other materials mentioned in the text, the user is advised to obtain available product safety information and take the necessary steps to ensure safety of use.

Patent / Intellectual Property Warning

NuSil Technology disclaims any expressed or implied warranty against the infringement of any domestic or international patent/intellectual property right. NuSil Technology does not warrant the use or sale of the products described herein will not infringe the claims of any domestic or international patent/intellectual property right covering the product itself, its use in combination with other products, or its use in the operation of any process.